


INSULATION OR GEOFOAM

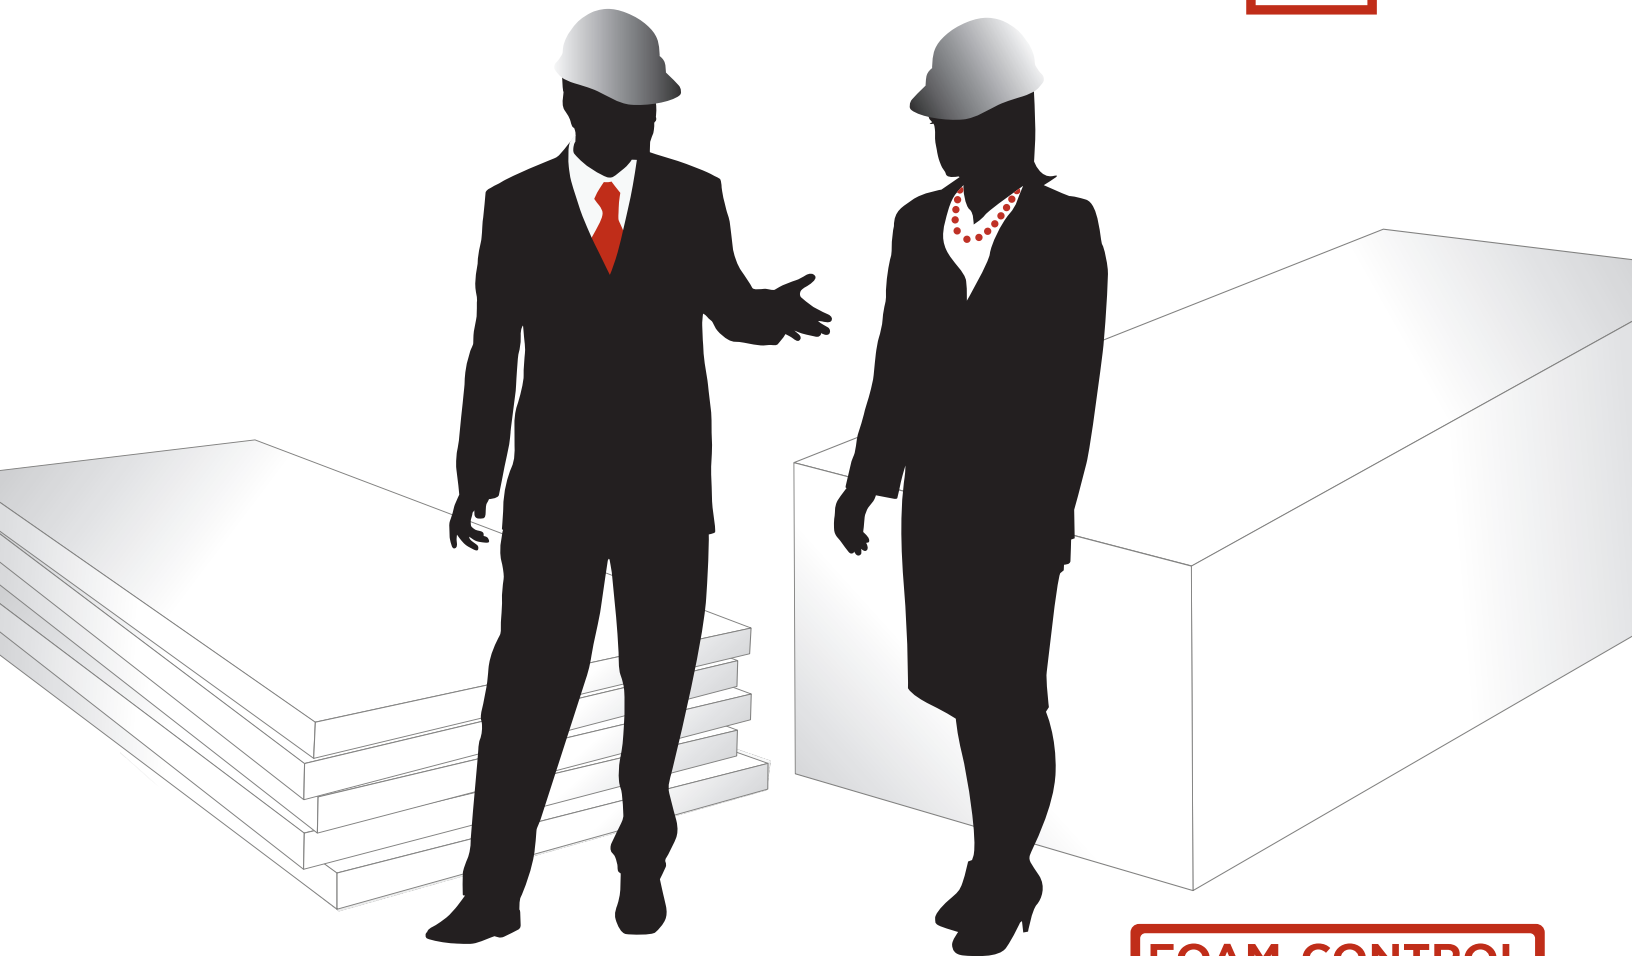


**FOAM
CONTROL**®

**FOAM-CONTROL
GEOFOAM**™

Insulation and Geofoam are both molded polystyrene, but ...

Insulation uses the
ASTM C578 Standard

**FOAM
CONTROL**®

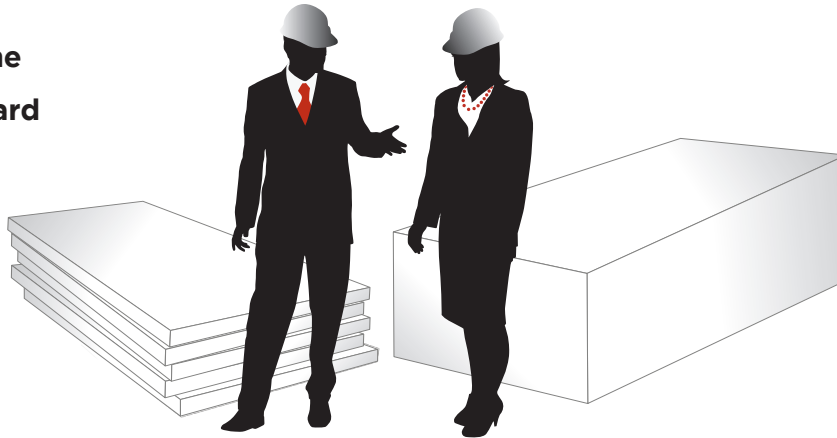


Geofoam uses the
ASTM D6817 Standard

**FOAM-CONTROL
GEOFOAM**™

**FOAM
CONTROL**®

Insulation.

Foam-Control® is a quality building insulation that comes in a variety of compressive strengths and R-values with resistance to moisture gain and has quick drying potential. Foam-Control insulation is used in foundations, walls, and roofs in all types of building construction and can be relied on to provide long lasting constant R-value performance.

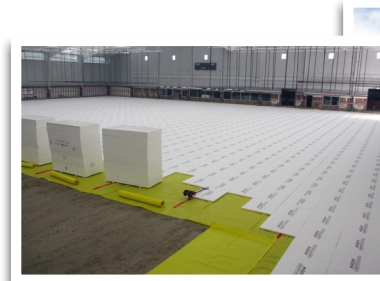


Perimeter/Under-slab



Walls



Paver Decks

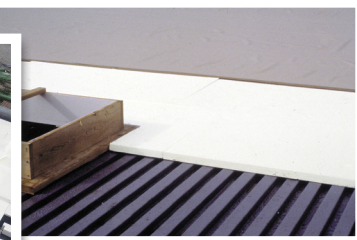

Roofing

**FOAM-CONTROL
GEOFOAM**™

Lightweight fill material.

Foam-Control Geofoam is a trusted lightweight structural fill with high compressive strength and unmatched durability. Foam-Control Geofoam is used as structural fill for plaza areas, vegetative roofs, landscaping, elevation changes for floors/stairs/ramps, and many other building applications that need a structural lightweight fill solution.



Elevation Changes



Vegetative Roofs



Plaza Areas



Landscaping

Specifications

Using the correct specifications for the application

Each project is unique and may require Foam-Control insulation, Foam-Control Geofoam, or both. It is important to develop specifications using the correct ASTM Standard.

Insulation specifications following ASTM C578

Specifications following ASTM C578 are available at: www.foam-control.com/design-resources-foam-control

Geofoam specifications following ASTM D6817

Specifications following ASTM D6817 are available at: www.geofoam.com/design-resources



Foam-Control insulation is manufactured in sheet form and meets **ASTM C578**, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation"¹. Key properties are shown below.



Product		100	130	150	250	400	600
R-value per inch, @ 75°F	°F·ft ² ·h/Btu (°K·m ² /W)	3.9 (0.68)	3.9 (0.69)	4.2 (0.73)	4.4 (0.77)	4.4 (0.77)	4.5 (0.78)
Compressive Strength ² @ 10% deformation, min.	psi (kPa)	10 (69)	13 (90)	15 (104)	25 (173)	40 (276)	60 (414)
ASTM C578 Compliance, Type		I	VIII	II	IX	XIV	XV

1. Please refer to Foam-Control Insulation TechData for complete information.
2. Compressive strength is measured at 10% in accordance with ASTM C578. A safety factor is required for long-term sustained loads. For static loads, a safety factor of 3:1 is recommended.



Foam-Control Geofoam is manufactured in block form and meets **ASTM D6817**, "Standard Specification for Rigid, Cellular Polystyrene Geofoam"¹. Key properties are shown below¹.



Product		15	19	22	29	39	46
Compressive Resistance ² @ 1% deformation, min.	psi (kPa)	3.6 (25)	5.8 (40)	7.3 (50)	10.9 (75)	15.0 (103)	18.6 (128)
Elastic Modulus, min	psi (kPa)	360 (2500)	580 (4000)	730 (5000)	1090 (7500)	1500 (10300)	1860 (12800)
ASTM D6817 Compliance, Type		EPS15	EPS19	EPS22	EPS29	EPS39	EPS46

1. Please refer to Foam-Control Geofoam TechData for complete information.
2. Compressive resistance is measured at 1% in accordance with ASTM D6817 and is the allowable long-term sustained loads.

More than just foam—a complete system.

When you choose Foam-Control, you're collaborating with a team of experts who work with you every step of the way. We're here to answer your questions, solve your problems, and do everything we can to make sure your project proceeds smoothly and ends successfully. Foam-Control is manufactured by a network of manufacturers located throughout North America and the world.



Foam-Control products are manufactured by AFM Corporation licensees.

Copyright © 2018 AFM Corporation. All rights reserved. Printed in USA. Foam-Control is a registered trademark of AFM Corporation, Lakeville, MN. The Foam-Control Geofoam logo is a trademark of AFM Corporation, Lakeville, MN.

UL logo is a registered trademark of UL LLC.

USGBC logo is a registered trademark of U.S. Green Building Council.

FC60-07/18